

**The PBX logger ActiveX
PRINTED MANUAL**

PBX logger ActiveX

© 1999-2008 AGG Software

All rights reserved. No parts of this work may be reproduced in any form or by any means - graphic, electronic, or mechanical, including photocopying, recording, taping, or information storage and retrieval systems - without the written permission of the publisher.

Products that are referred to in this document may be either trademarks and/or registered trademarks of the respective owners. The publisher and the author make no claim to these trademarks.

While every precaution has been taken in the preparation of this document, the publisher and the author assume no responsibility for errors or omissions, or for damages resulting from the use of information contained in this document or from the use of programs and source code that may accompany it. In no event shall the publisher and the author be liable for any loss of profit or any other commercial damage caused or alleged to have been caused directly or indirectly by this document.

Printed: 09.09.2008

Publisher

AGG Software

Production

© 1999-2008 AGG Software
<http://www.aggsoft.com>

Table of Contents

| | |
|--|-----------|
| Part 1 Introduction | 1 |
| 1 | 1 |
| 2 | 2 |
| 3 | 2 |
| 4 | 2 |
| 5 | 3 |
| 6 | 4 |
| Part 2 | 4 |
| 1 | 4 |
| ITLoggerControlAX | 5 |
| ITLoggerControlAX::RegisterDataNotify..... | 6 |
| ITLoggerControlAX::GetConfigurations..... | 6 |
| ITLoggerControlAX::GetConfigID..... | 7 |
| ITLoggerControlAX::Send..... | 8 |
| ITLoggerControlAX::StartPause..... | 9 |
| ITLoggerControlAX::SetLicenseKey..... | 9 |
| ITLoggerControlAX::SetOption..... | 10 |
| ITLoggerControlAX::GetOption..... | 11 |
| ITLoggerControlAX::SaveApplyOptions | 12 |
| ITLoggerControlAXEvents | 13 |
| ITLoggerControlAXEvents::OnData..... | 13 |
| ITLoggerControlAXEvents::OnDataPacket..... | 14 |
| ITLoggerControlAXEvents::OnEvent..... | 15 |

1 Introduction

1.1

PBX logger ActiveX Data Logger is an ActiveX component, RS232 COM Advanced PBX Data Logger. Advanced PBX Data

PBX logger ActiveX:

32-bit ActiveX (Visual C++, Delphi, Microsoft Office .NET). Visual Basic ActiveX

- ActiveX Automation
Windows
Visual Basic.

Advanced PBX Data Logger,

Advanced PBX Data Logger

Advanced PBX Data Logger
COM

Advanced PBX Data Logger

RS232


Microsoft Excel c

Visual Basic.

: <http://www.aggsoft.ru/>

: <http://www.aggsoft.ru/rs232-logger-activex.htm>.

1.2

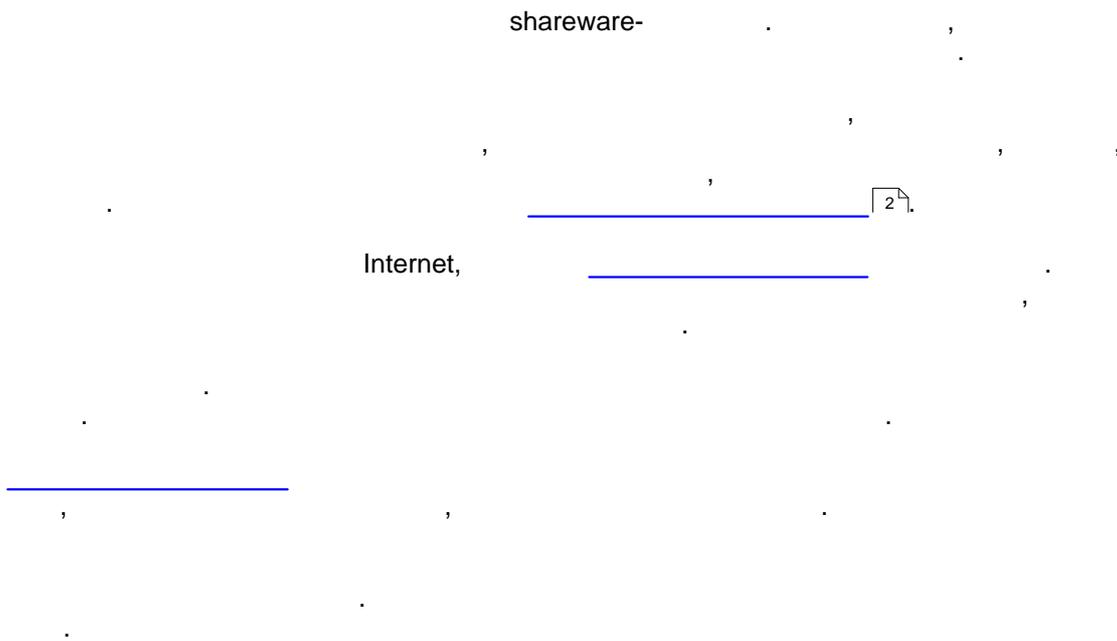

1.3

| | |
|--------------------|--|
| PBX logger ActiveX | support@aggsoft.ru |
| | support@aggsoft.ru |
| | sales@aggsoft.ru |

1.4

Copyright © 1999-2008 AGG Software.
All Rights Reserved

1. "PBX logger ActiveX"
- 2.

```

3.          "PBX logger ActiveX"
4.
5.          "PBX logger ActiveX"
           sales@aggsoft.ru
6. "PBX logger ActiveX"
           "PBX logger ActiveX"
7. "PBX logger ActiveX"          "AS IS".
8.
9.          "PBX logger ActiveX"
10.         -
           "PBX logger ActiveX"
           "PBX logger ActiveX".

```

1.5

- Windows 95 (comctrl.dll,);
- Windows 95 OSR2;
- Windows 98;
- Windows Me.

- Windows NT4 (SP4).
- Windows 2000 Professional;
- Windows 2000 Server;
- Windows XP x86 x64;
- Windows 2003 Server x86 x64;
- Windows Vista () x86 x64.

Internet Explorer 5.0

ActiveX

Advanced PBX Data Logger

1.6

Advanced PBX Data Logger.

, "PBX logger ActiveX"
PBX Data Logger"

"/Programs Files/Advanced

"PBX logger ActiveX"
!register.bat

2

pbxlogger.

API

pbxlogger

- [_____](#) 

2.1

logger ActiveX.
ActiveX.

COM

PBX
PBX logger

- [ITLoggerControlAX](#) 
- [ITLoggerControlAXEvents](#) 

2.1.1 ITLoggerControlIAX

PBX logger ActiveX Object.

ITLoggerControlIAX

| | | |
|--|---|---------------------------------|
| | RegisterDataNotify 6 | |
| | GetConfigurations 6 | : COM1+CRLF+COM2+CRLF CR+LF. |
| | GetConfigID 7 | (ID) |
| | Send 8 | |
| | StartPause 9 | / |
| | SetLicenseKey 9 | |
| | SetOption 10 | |
| | GetOption 11 | |
| | SaveApplyOptions 12 | |

:

```

:      pbxlogger.h
:      pbxlogger.lib

```

2.1.1.1 ITLoggerControlAX::RegisterDataNotify

[C++]

```
long RegisterDataNotify(
    long ConfigID
    long NotifyType
);
```

[Visual Basic]

```
object.RegisterDataNotify(
    ConfigID As Long
    NotifyType As Long
) As Long
```

ConfigID

[in]

(ID)

[GetConfigID](#)

NotifyType

[in]

(RAW)

; 1 -

: 0 -

; 2 -

:

:

pbxlogger.h

:

pbxlogger.lib

:

[ITLoggerControlAX](#)

2.1.1.2 ITLoggerControlAX::GetConfigurations

CR+LF. : COM1+CRLF+COM2+CRLF

[C++]

```
BSTR GetConfigurations();
```

[Visual Basic]

```
object.GetConfigurations() As String
```

:

```
: pbxlogger.h
: pbxlogger.lib
```

:

[ITLoggerControlAX](#) 

2.1.1.3 ITLoggerControlAX::GetConfigID

(ID)

[C++]

```
long GetConfigID(
    BSTR ConfigName
);
```

[Visual Basic]

```
object.GetConfigID(
    ConfigName As String
) As Long
```

ConfigName

[in]

[GetConfigurations](#) 

:

```
: pbxlogger.h
: pbxlogger.lib
```

:

[ITLoggerControlAX](#) 

2.1.1.4 ITLoggerControlAX::Send

[C++]

```
long Send(
    long ConfigID
    long SendType
    long DataType
    BSTR Data
);
```

[Visual Basic]

```
object.Send(
    ConfigID As Long
    SendType As Long
    DataType As Long
    Data As String
) As Long
```

ConfigID

[in] (ID)
[GetConfigID](#) ⁷

SendType

[in] : 0 - ; 1 - ; 2 -

DataType

[in] : 0 - ; 1 - #AA

Data

[in]

:

: pbxlogger.h
 : pbxlogger.lib

:

[ITLoggerControlAX](#) ⁵

2.1.1.5 ITLoggerControlAX::StartPause

[C++]

```
long StartPause(
    long ConfigID
    long State
);
```

[Visual Basic]

```
object.StartPause(
    ConfigID As Long
    State As Long
) As Long
```

ConfigID

[in]

(ID)

[GetConfigID](#)*State*

[in]

0

). State=0,

:

:

pbxlogger.h

:

pbxlogger.lib

:

[ITLoggerControlAX](#)

2.1.1.6 ITLoggerControlAX::SetLicenseKey

[C++]

```
long SetLicenseKey(
    BSTR Key
);
```

[Visual Basic]

```
object.SetLicenseKey(
    Key As String
) As Long
```

Key
[in] : AAAA-BBBB-CCCC-DDDD

:
: pbxlogger.h
: pbxlogger.lib

[ITLoggerControlAX](#) ⁵

2.1.1.7 ITLoggerControlAX::SetOption

[C++]

```
long SetOption(
    long ConfigID
    BSTR Option
    VARIANT* Value
);
```

[Visual Basic]

```
object.SetOption(
    ConfigID As Long
    Option As String
    Value As Variant
) As Long
```

ConfigID
[in] (ID)
[GetConfigID](#) ⁷

Option
[in] / Window (
[SaveApplyOptions](#)) ¹²

Value
[in] True False boolean.

```

:
:
:      pbxlogger.h
:      pbxlogger.lib
:

```

[ITLoggerControlAX](#) ⁵

2.1.1.8 ITLoggerControlAX::GetOption

[C++]

```

long  GetOption(
    long    ConfigID
    BSTR    Option
    VARIANT** Value
);

```

[Visual Basic]

```

object.GetOption(
    ConfigID As Long
    Option  As String
    Value   As Variant
) As Long

```

ConfigID

[in]

(ID)
[GetConfigID](#) ⁷

Option

[in]

/ [SaveApplyOptions](#) ¹²

Window (

Value

[out]

True False

boolean.

```

:
:
:      pbxlogger.h
:      pbxlogger.lib
:

```

[ITLoggerControlAX](#) ⁵

2.1.1.9 ITLoggerControlAX::SaveApplyOptions

```
HKEY_LOCAL_MACHINE\SOFTWARE\AGG Software\Advanced PBX Data Logger\
{8BB712F0-490F-499F-B616-3E809FAE4A22}.
```

```
HKEY_CURRENT_USER\SOFTWARE\AGG Software\Advanced PBX Data Logger\
{8BB712F0-490F-499F-B616-3E809FAE4A22}
```

```
INI (INI),
: "{8BB712F0-490F-499F-B616-3E809FAE4A22}"
```

[C++]

```
long SaveApplyOptions(
    long ConfigID
    long DoSave
);
```

[Visual Basic]

```
object.SaveApplyOptions(
    ConfigID As Long
    DoSave As Long
) As Long
```

ConfigID

[in] (ID),
[GetConfigID](#)

DoSave

[in] > 0,

INI

:

: pbxlogger.h
 : pbxlogger.lib

:

[ITLoggerControlAX](#)

2.1.2 ITLoggerControlAXEvents

PBX logger ActiveX.

ITLoggerControlAXEvents

| | | | |
|--|--|-------------|-------------------|
| | OnData ¹³ | Data Logger | Advanced PBX |
| | OnDataPacket ¹⁴ | Logger. | Advanced PBX Data |
| | OnEvent ¹⁵ | | |

:

```

:      pbxlogger.h
:      pbxlogger.lib

```

2.1.2.1 ITLoggerControlAXEvents::OnData

Advanced PBX Data Logger

[C++]

```

HRESULT OnData(
    BYTE DataSent
    BSTR Data
);

```

[Visual Basic]

```

object.OnData(
    DataSent As Byte
    Data As String
)

```

DataSent
[in] DataSent>0 (Data) , (Data)

Data

```

[in] .
:
:
:      pbxlogger.h
:      pbxlogger.lib
:

```

[ITLoggerControlAXEvents](#)^[13]

2.1.2.2 ITLoggerControlAXEvents::OnDataPacket

Advanced PBX Data Logger.

[C++]

```

HRESULT  OnDataPacket(
    BYTE      DataSent
    VARIANT*  VarNames
    VARIANT*  VarValues
);

```

[Visual Basic]

```

object.OnDataPacket(
    DataSent As Byte
    VarNames As Variant
    VarValues As Variant
)

```

```

DataSent
[in]      DataSent>0      (Data)      ,      (Data)
.
VarNames
[in]      ,      .
-
VarValues
[in]      ,      .
:
:
:      pbxlogger.h
:      pbxlogger.lib
:

```

[ITLoggerControlAXEvents](#)¹³

2.1.2.3 ITLoggerControlAXEvents::OnEvent

[C++]

```
HRESULT OnEvent (
    long      Event
    BSTR      EventName
    VARIANT*  ArgNames
    VARIANT*  ArgValues
);
```

[Visual Basic]

```
object.OnEvent(
    Event      As Long
    EventName  As String
    ArgNames   As Variant
    ArgValues  As Variant
)
```

Event

[in]

EventName

[in]

PORT-OPEN.

ArgNames

[in]

' (-) .

ArgValues

[in]

' ,

:

: pbxlogger.h
: pbxlogger.lib

:

[ITLoggerControlAXEvents](#)¹³