

"Data encode"

I

"Data encode"

---

1		1
2		1
3	<b>Data encode</b>	1
4		2
5		3
6	?	4
1	.....	4

1

"Data encode"	JSON, XML-RPC	CSV.
JSON		MQTT

2

Data encode : Windows 2000 SP4 32-bit 64-bit

5 MB

( ), Advanced Serial Data Logger.


3

## Data encode

1. ( , Advanced Serial Data Logger), ;
  2. ;
  3. ,  
Windows;
  4. .
  5. " " ;
  6. " " "

. 1-2.

2

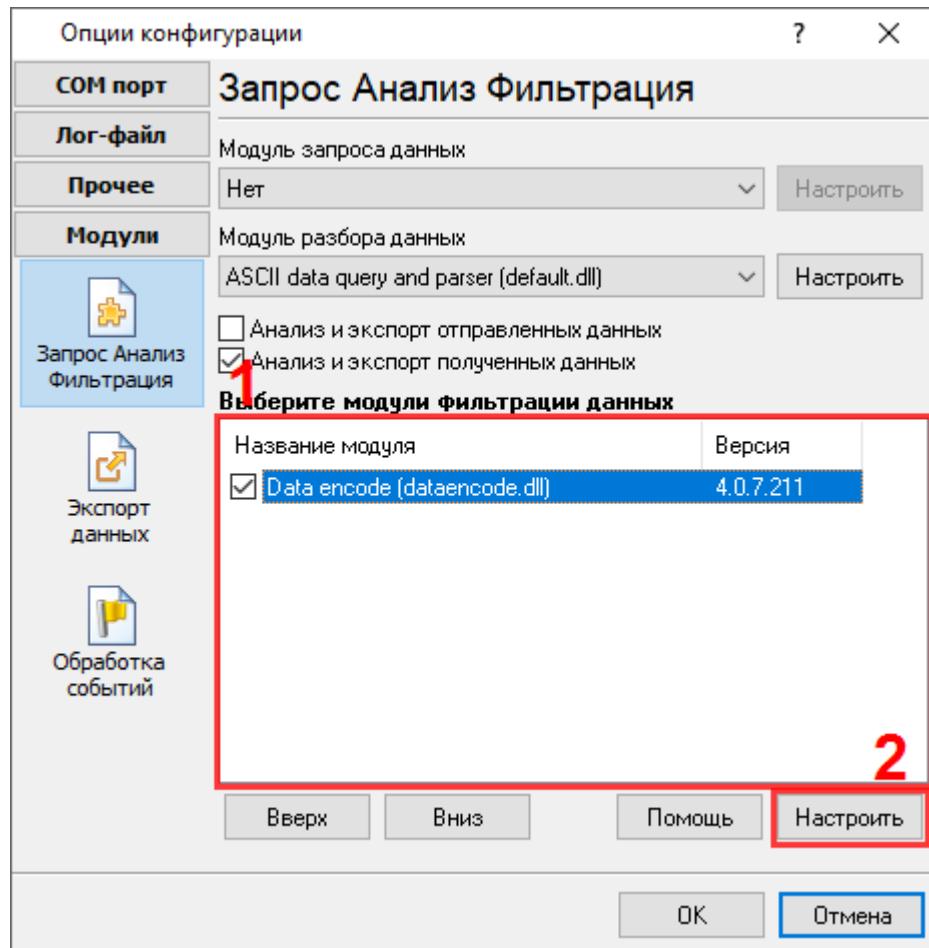**"Data encode"**

.1.


4

**Plug-in -**

Advanced Serial Data Logger

5

"Data encode" ( .1)

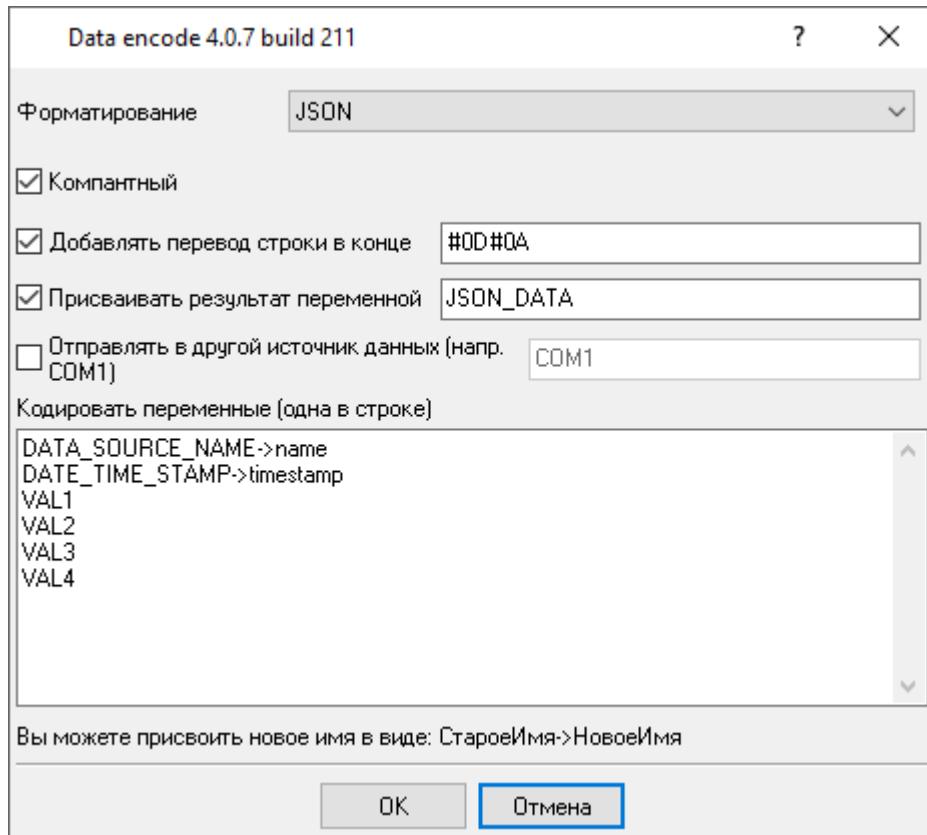

.1.

### JSON

```
{
  "firstName": "John",
  "lastName": "Smith",
  "isAlive": true,
  "age": 27,
}
```

### XML-RPC

```
<PutData>
  <value><i4>1404</i4></value>
  <value><string>Something here</string></value>
  <value><i4>1</i4></value>
</PutData>
```

### CSV

"1997", "Ford", "E350"

CR (0x0D) LF (0x0A).

ASCII

redirect".

"Data

VAR1->variable1  
VAR2->variable2

**6**

**?**

**6.1**

"Plugins"

( ) -

%s [%s] -

(%s) -

%,  
%,

%,  
%,  
%).

[support@aggsoft.ru](mailto:support@aggsoft.ru).

, "%%S"